


TSA 100 x 355



Technical data

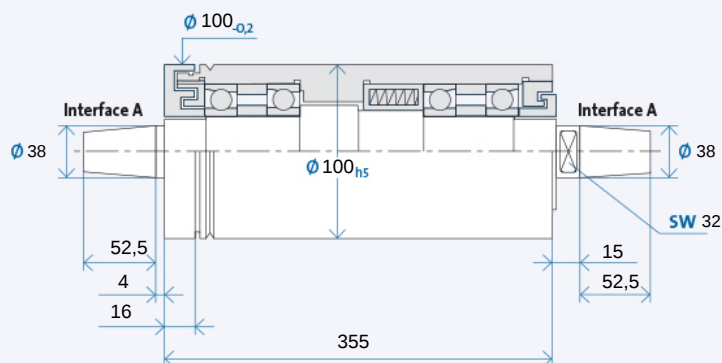

Maximum speed $n_{\max}$ [min⁻¹]* for bearing types:

Steel (steel) 15000



Hybrid (optional) 20000

* without tool

Ordering information: TSA 100 x 355 R is for clockwise, L for counter-clockwise


ROTATION (CW.)

ROTATION (CCW.)



Accessories

TSA Grinding wheel flanges

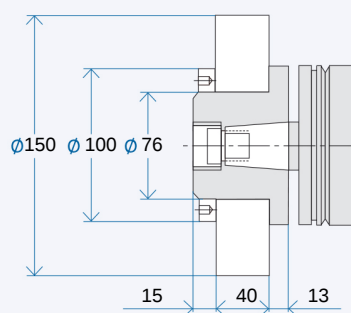

Ordering information flange: AX₁/X₂/X₃

X₁: Interface: 07/08/...


X₂: Flange style: MO/MS

X₃: Wheel: K = Corundum grinding wheel
D = Diamond or CBN grinding wheel

Puller for flange: AX₁/X₂

Balancing quill for flange: AX₁

Pulleys



Interface	Dimensions [mm]		
	D	C	T
A 38	50	80	60
	63	80	60
	160	80	60


Ordering information pulley: AX₁-X₂

X₁: Interface: 07/08/...

X₂: Figure from column D

Puller for pulley: AX₁/...

TSA Grinding quill – semifinished



Ordering information semifinished: AX₁

X₁: Interface 10/13/...