


TSA 32 x 125



Technical data

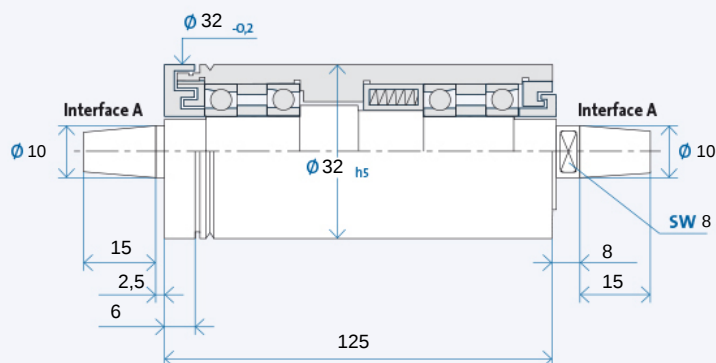

Maximum speed n_{max} [min⁻¹]* for bearing types:



Steel (steel)	60000
Hybrid (optional)	x

* without tool


Ordering information: TSA 32 x 125 R is for clockwise, L for counter-clockwise

ROTATION (CW.)

ROTATION (CCW.)




Tool interface



Tool interface: taper 1 : 7,5 nominal value, included angle acc. to GMN precision standards


Pulley interface



Pulley interface: taper 1 : 7,5 nominal value, included angle acc. to GMN precision standards

Accessories

TSA Grinding wheel flanges

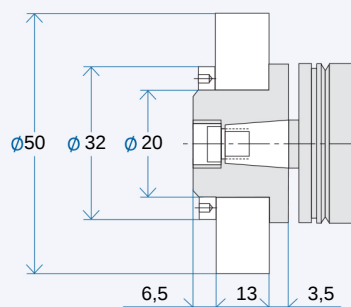

Ordering information flange: AX₁/X₂/X₃

X₁: Interface: 07/08/...

X₂: Flange style: MO/MS

X₃: Wheel:


K = Corundum grinding wheel

D = Diamond or CBN grinding wheel

Puller for flange: AX₁/X₂

Balancing quill for flange: AX₁

Pulleys



Interface	Dimensions [mm]		
	D	C	T
A 10	18	30	20
	50	30	20
	17	40	20
	20	40	20
	25	40	20
	63	40	20


Ordering information pulley: AX₁-X₂

X₁: Interface: 07/08/...

X₂: Figure from column D

Puller for pulley: AX₁/...

TSA Collet chuck



Interface	Dimensions [mm]				
	K	T	L	S	O
A 10	2	13,5	37	14	13,5
	3	13,5	37	14	13,5
	4	13,5	37	14	13,5
	4	13,5	37	14	13,5

Ordering information collet chuck: AX₁/X₂-(K)

X₁: Interface: 07/08/...

X₂: Housing diameter: 20/26/...

(K) = Inner diameter collet chuck