


# TSP 40 x 250



## Technical data

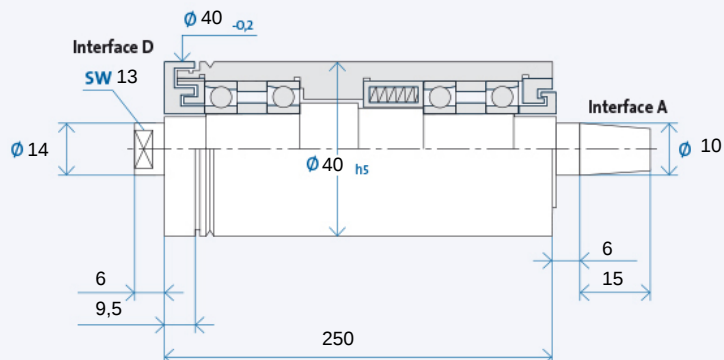


Maximum speed  $n_{max}$  [min<sup>-1</sup>]\* for bearing types:

|                   |       |
|-------------------|-------|
| Steel (steel)     | 45000 |
| Hybrid (optional) | 55000 |


\* without tool

Ordering information: TSP 40 x 250 R is for clockwise, L for counter-clockwise


ROTATION (CW.)



ROTATION (CCW.)




## Tool interface



**Tool interface:** fitting bores with flat contact face acc. to GMN precision standards


## Pulley interface




**Pulley interface:** taper 1 : 7,5 nominal value, included angle acc. to GMN precision standards

## Accessories


### Pulleys

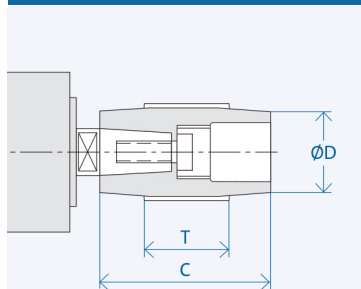

### TSP Collet chuck

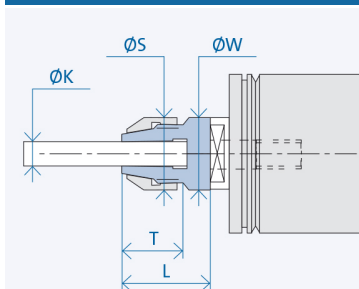

### TSP Grinding quill – semifinished



Ordering information semifinished: DX<sub>1</sub>/X<sub>2</sub>  
X<sub>1</sub>/X<sub>2</sub> : Interface 08/14/...

| Interface | Dimensions [mm] |    |    |
|-----------|-----------------|----|----|
|           | D               | C  | T  |
| A 10      | 18              | 30 | 20 |
|           | 50              | 30 | 20 |
|           | 17              | 40 | 20 |
|           | 20              | 40 | 20 |
|           | 25              | 40 | 20 |
|           | 63              | 40 | 20 |

Ordering information pulley: AX<sub>1</sub>-X<sub>2</sub>

X<sub>1</sub>: Interface: 10/13/...

X<sub>2</sub>: Figure from column D

Puller for pulley: AX<sub>1</sub>/...

| Interface | Dimensions [mm] |    |    |    |    |  |
|-----------|-----------------|----|----|----|----|--|
|           | K               | T  | L  | S  | W  |  |
| D 08/14   | 3               | 20 | 26 | 14 | 14 |  |

Ordering information collet chuck: D 08/14/(K)  
(K) = Clamping diameter

This data sheet reflects the state of information at the time of printing. Subject to technical changes. Information on possible options can be obtained from our catalogue which can be downloaded at [www.gmn.de](http://www.gmn.de)