


TSP 50 x 160



Technical data

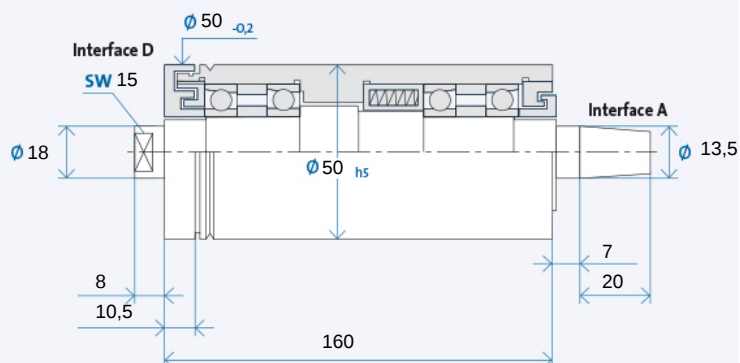

Maximum speed $n_{\max}$ [min⁻¹]* for bearing types:


Steel (steel) 35000

Hybrid (optional) 42000


* without tool

Ordering information: TSP 50 x 160 R is for clockwise, L for counter-clockwise


ROTATION (CW.)



ROTATION (CCW.)




Tool interface



Tool interface: fitting bores with flat contact face acc. to GMN precision standards


Pulley interface




Pulley interface: taper 1 : 7,5 nominal value, included angle acc. to GMN precision standards

Accessories


Pulleys

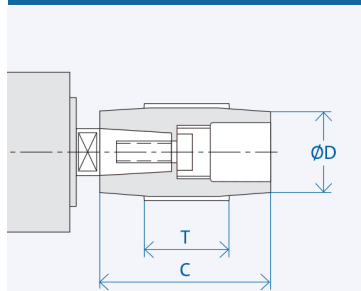

TSP Collet chuck



TSP Grinding quill – semifinished



Ordering information semifinished: DX₁/X₂
X₁/X₂ : Interface 08/14/...

Interface	Dimensions [mm]		
	D	C	T
A 13	20	50	30
	25	50	30
	32	50	30
	80	50	30

Ordering information pulley: AX₁-X₂

X₁: Interface: 10/13/...

X₂: Figure from column D

Puller for pulley: AX₁/...

Interface	Dimensions [mm]				
	K	T	L	S	W
D 10/18	6	20	30	18	18

Ordering information collet chuck: D 10/18/(K)
= Clamping diameter

Ordering information collet chuck: D 10/18/(K)
(K) = Clamping diameter