


TSP 60 x 200



Technical data

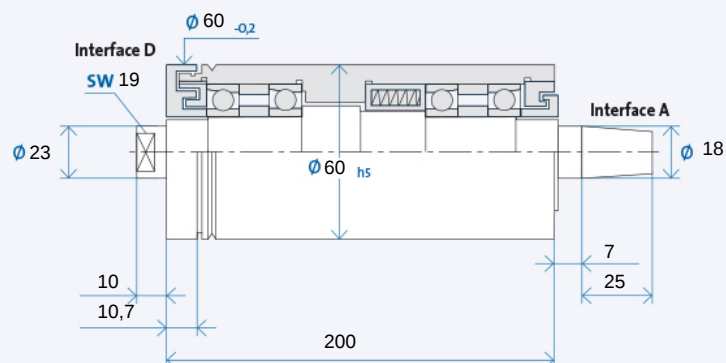


Maximum speed $n_{\max}$ [min⁻¹]* for bearing types:

Steel (steel)	30000
Hybrid (optional)	35000


* without tool

Ordering information: TSP 60 x 200 R is for clockwise, L for counter-clockwise


ROTATION (CW.)



ROTATION (CCW.)




Tool interface



Tool interface: fitting bores with flat contact face acc. to GMN precision standards


Pulley interface



Pulley interface: taper 1 : 7,5
nominal value, included angle acc.
to GMN precision standards

Accessories

Pulleys

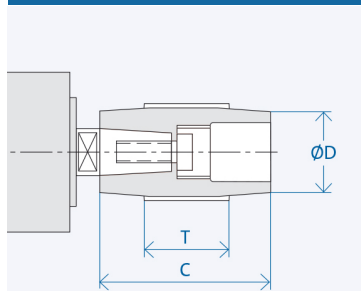

Interface	Dimensions [mm]		
	D	C	T
A 18	25	60	40
	32	60	40
	40	60	40
	100	60	40


Ordering information pulley: AX_1-X_2

X₁: Interface: 10/13/...

X_2 : Figure from column D

Puller for pulley: $AX_1/\dots$

TSP Collet chuck

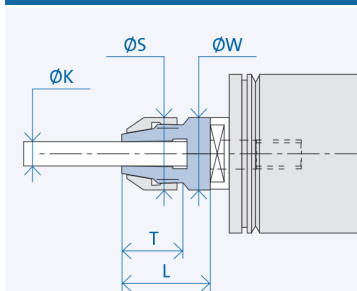


Interface	Dimensions [mm]				
	K	T	L	S	W
D 14/23	6	20	30	23	23

Ordering information collet chuck: D 14/23/(K)
 (K) = Clamping diameter

Ordering information collet chuck: D 14/23/(K)
(K) = Clamping diameter

TSP Grinding quill – semifinished



Ordering information semifinished: DX₁/X₂
X₁/X₂ : Interface 08/14/...